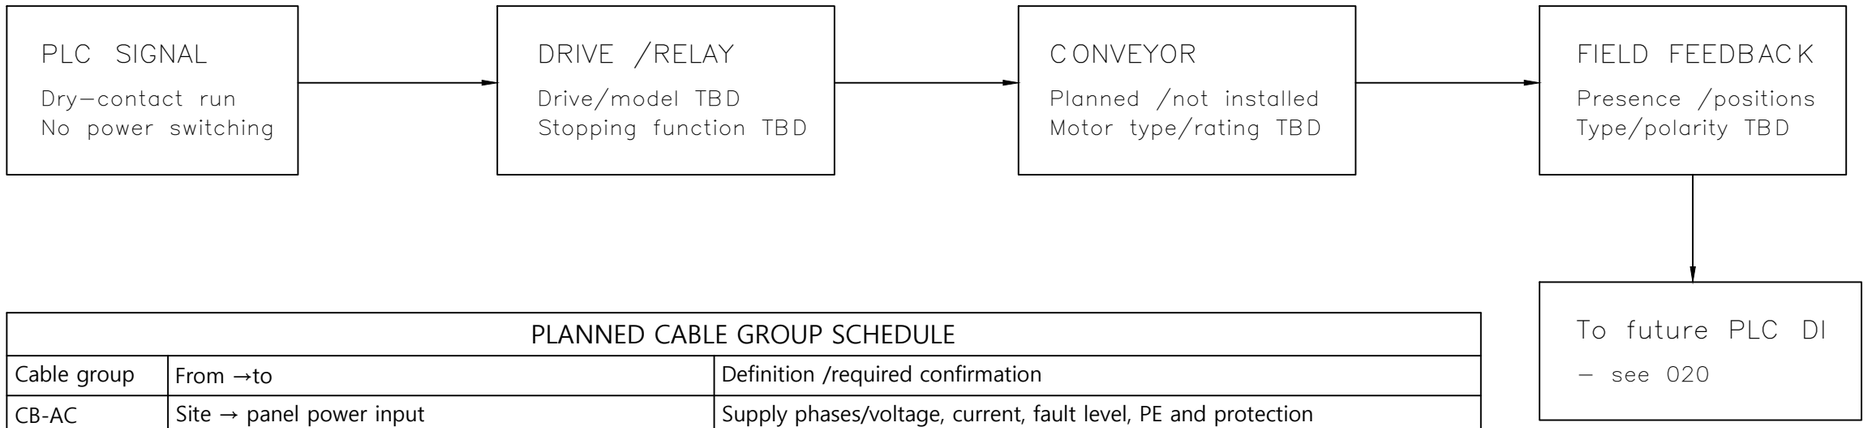

PLANNED CABLE GROUP SCHEDULE		
Cable group	From →to	Definition /required confirmation
CB-AC	Site → panel power input	Supply phases/voltage, current, fault level, PE and protection
CB-CTRL	24V distribution → sensors/operator devices	Core count, polarity, fuse, returns and shielding as selected
CB-ACT	Safe24V /relay contacts →solenoids	Coil current/inrush, cable size, polarity and suppression
CB-MOTOR	Selected drive →motor	AC/DC model, rated load, EMC/PE/overload per drive manual
CB-NET	PC↔future PLC interfaces	Wired ports and cable selection TBD; current ESP link is Wi-Fi, see 003.
CB-USB	PC power/monitor →ESP board	Current sensor implementation; not RS485 motor controller
CB-SEN	ESP→SEN0137	Actual3V3/GND/GPIO4; supply-range check open

COMPONENT /CABLE SCHEDULE CONTENT REQUIRED

Each installed device needs tag, exact model, electrical rating, terminal reference, status and drawing cross–reference.
Each cable needs unique ID, endpoints, cores, conductor size, shield/PE policy and termination by wire number.
ESP32 is used for sensing only. Future motor control is assigned to the selected PLC/drive interface, not to ESP GPIO.
Do not invent motor current, wire cross–section, fuse size, PLC field port or unused analog modules to fill blanks. Select them when hardware is available.

These P sheets retain the electrical design workflow and visible decisions; they are not representations of equipment already installed or tested.

NO.	DATE	REVISION
R0	2026–10–22	CONCEPT / NOT FOR CONSTRUCTION

DWG. TITLE

SEMICON SORTER PROJECT
Final Test and Multi–Bin Sorting Cell

PLANNED FIELD INTERFACES AND CABLE SCHEDULE

DRAWN BY	DATE
J. H. KO	2026–10–14

DWG. NO
022

SHEET NO
1 OF 1